


Mounting Instructions

KYMCO DINK 125

(cod. A/420)

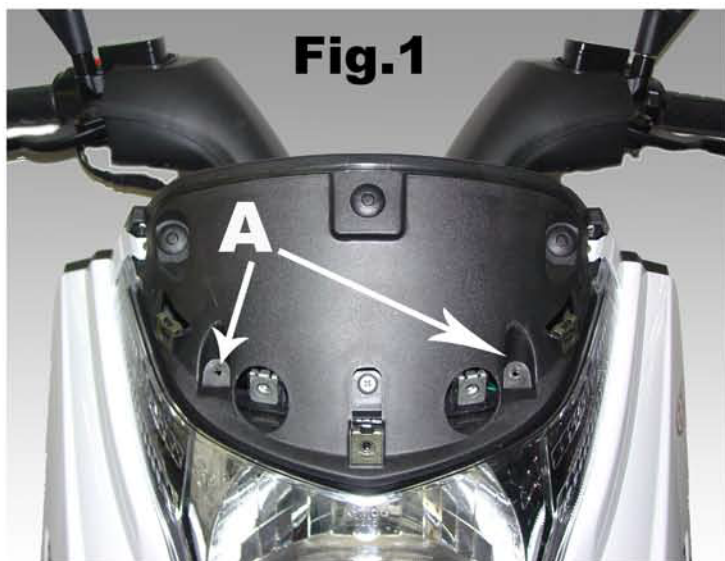


Remove the stock windshield by removing the plastic bezel.

Attach the rods Isotta to the scooter inserting the spacers H10-A-points shown in Fig.1

Position the rods as in fig.2 and fig.3

Insert the rubber tip Isotta and the two mushrooms screws in plastic in the two upper holes of parabrezza to the lower holes use the grommets and original spacers.

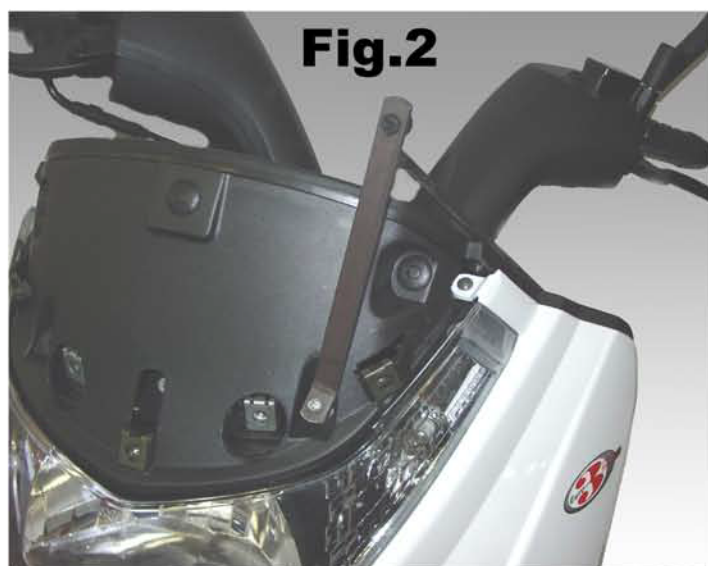

To complete the mounting tighten all screws.



Included in the package are:

- 4pcs - self-tapping screws 4.2x32 (cross head)
- 2pcs - self-tapping screws 4.8x25 (cross head)
- 2pcs - plastic nuts
- 2pcs - circular spacers h11 d12 f6
- 2pcs - grommets windscreen (3mm)
- 2pcs - mushrooms screws
- 1pc - rod left Dink 125_07
- 1pc - rod right Dink 125_07